


# GN 111.6


Retaining rings



INOX  
Stainless Steel

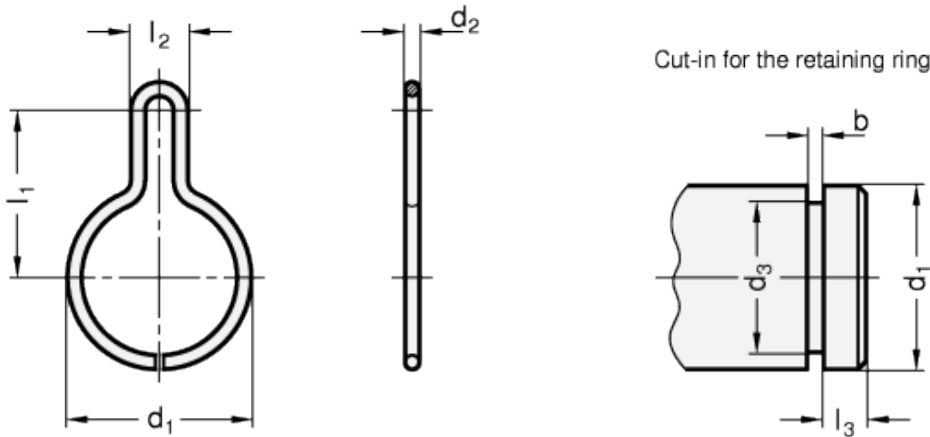

The retaining rings are to be mounted in radial direction as shown in the drawing



technical informations

**Specification**  
Stainless Steel  
AISI 301

**Information**

Retaining rings GN 111.6 are normally used together with ball chains or retaining cables.  
One typical application involves making star knobs captive, for instance.  
Ball chains and retaining cables to be ordered separately.

Standard Elements	Main dimensions							Weight
Description	$d_1$	$d_2$	$d_3 \pm 0.2$	$b_{+0.2}$	$l_1$	$l_2 + 0.3$	$l_3 + 0.3$	g
GN 111.6-12	12	1.4	9.2	1.7	16	5.6	2.5	-
GN 111.6-14	14	1.5	11	1.8	17	6	3.2	-
GN 111.6-15	15	1.5	11.9	1.8	17	6	3.2	-
GN 111.6-16	16	1.5	12.9	1.8	17	6	3.2	-
GN 111.6-17	17	1.6	13.7	1.9	19	6.4	3.9	-
GN 111.6-18	18	1.6	14.7	1.9	19	6.4	3.9	-
GN 111.6-19	19	1.6	15.7	1.9	19	6.4	3.9	-
GN 111.6-20	20	1.6	16.7	1.9	19	6.4	3.9	-
GN 111.6-21	21	1.7	17.5	2	20	6.8	5.1	-
GN 111.6-22	22	1.7	15.7	2	20	6.8	5.1	-
GN 111.6-23	23	1.7	19.5	2	20	6.8	5.1	-
GN 111.6-24	24	1.7	20.5	2	20	6.8	5.1	-
GN 111.6-26	26	1.8	22.3	2.1	21	7.2	5.4	-



STANDARD MACHINE ELEMENTS WORLDWIDE